


#2



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Marc Bolduc et al.	Examiner:	N/A
Serial No.:	To be assigned	Group Art Unit:	N/A
Filed:	August 13, 2001	Docket:	30566.197-US-01
Title:	DISPLAYING IMAGE DATA		

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL815953226US

Date of Deposit: August 13, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service 'Express Mail Post Office 'To Addressee' service under 37 CFR 1.10 and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

By: Isabell Ogata  
Name: Isabell Ogata

COMMUNICATION REGARDING PRIORITY DOCUMENT

Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Please place the following Certified Priority Document into the file of the above-identified patent application, as follows:

**UNITED KINGDOM, Serial No. GB/01/09/621.3, Filed on April 19, 2001**

Respectfully submitted,

Marc Bolduc et al.

By their attorneys,

GATES & COOPER LLP

6701 Center Drive West, Suite 1050  
Los Angeles, California 90045  
(310) 641-8797

Date: August 13, 2001

By: Jason S. Feldmar  
Name: Jason S. Feldmar  
Reg. No.: 39,187

JSF/io

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 14 June 2001

**THIS PAGE BLANK (USPTO)**

Patents Form 1/77

Patents Act 1977

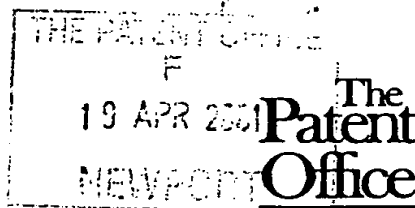

19APR01 5623029-1 C59521  
P01/7700 0.00-0109621.3

1/77

**Request for grant of a patent  
Grant**

The Patent Office  
Concept House  
Cardiff Road  
Newport  
Gwent NP10 8QQ

1.	Your reference	19 APR 2001	2034-P562-GB
2.	Patent application number	0109621.3	New
3.	Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	DISCREET LOGIC INC 10 Duke Street Montreal, Quebec Canada H3C 2L7  6972319002	
	Patents ADP number ( <i>if you know it</i> )		
	If the applicant is a corporate body, give the country/state of its incorporation	Quebec, Canada	
4.	Title of the invention	Displaying Image Data	
5.	Name of your agent	ATKINSON BURREN	
	"Address for service" in the United Kingdom to which all correspondence should be sent	25-29 President Buildings President Way Sheffield S4 7UR GB	
	Telephone No:	0114 275 2400	
	Patents ADP number	7807043001	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and ( <i>if you know it</i> ) the or each application number	Country N/A	Priority application number ( <i>if you know it</i> ) N/A
			Date of filing ( <i>day/month/year</i> ) N/A
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application N/A	Date of filing ( <i>day/month/year</i> ) N/A
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request?	Yes	

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

21

Claim(s)

08

Abstract

01

Drawings

13 + 13

en

10. If you are also filing any of the following, state how many against each item.

Priority documents

N/A

Translations of priority documents

N/A

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

None

Request for preliminary examination and search (*Patents Form 9/77*)

One

Request for substantive examination (*Patents Form 10/77*)

None

Any other documents  
(Please specify)

- 11.

I/We request the grant of a patent on the basis of this application.

Signature

Date Wednesday, 18 April 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

RALPH ATKINSON CPA  
0114 275 2400

Duplicate

## Displaying Image Data

### Background of the Invention

#### 1. Field of the Invention

5           The present invention relates to viewing image data over a network, and in particular relates to viewing a clip of image frames on a viewing station connected to a network over which the image data is transmitted.

#### 2. Description of the Related Art

10           Computer networks are used to transfer data of many kinds. Text data does not present much of a problem for today's networks. However, streams of media data, such as continuous sound and images, easily create problems for networks. The difficulty with media data is twofold: firstly, there is a lot of it, and secondly, it is usually desirable to listen to or view the data in real time as  
15           it is being transferred.

          Both these requirements can be eased by the use of data compression, and it is in this area that attempts to satisfy these requirements are most numerous. In particular, developments in the MPEG video format have enabled streaming of reasonable quality audio and low quality video,  
20           over the Internet, even when the connection is made by a telephone line and has a low bandwidth. The widespread adoption of compression standards has introduced audio and video to the home computer, upon which it is now possible to assemble and composite home movies of increasing duration and quality.

25           Professional digital image processing encompasses both video and, increasingly, high quality film editing. The amount of data in a single frame of

film can be as much as forty megabytes. Such frames need to be processed and or viewed at a rate of twenty-four frames per second, resulting in extremely high requirements for both data transfer and data processing. Often such transfers cannot be performed in real time over a network, either  
5 because the network has too low a bandwidth, or because network traffic is prohibitive. The problem in these high-end systems is the same as in general purpose computing, and it is only a matter of scale.

Data compression can be used to minimise the difficulty of supplying media data over a network, whether that be a high speed specialised video  
10 data network, or the Internet. The particular problem that remains is one of predictability: one may choose a level of data compression that seems likely to result in a sustainable reception of the media data, but this is a fixed assumption, and network capacity will vary from second to second. A fixed data rate will always either overestimate or underestimate the capacity of the  
15 network, which is forever changing.

In the art, the solution to these requirements is buffering. By fetching a few seconds' worth of media data before it is rendered, two systems are invoked: a prefetch system and a playback system. The prefetch system is a looped set of instructions to transfer as much data as possible into a memory  
20 buffer until the buffer is completely full. The playback system is a looped set of instructions to read from the buffer and render the data in real time. While the prefetch loop can vary in speed according to the conditions of the network, the playback rate is fixed. By providing a sufficiently long buffer, intermittent poor performance of the network will be compensated by peaks  
25 in data transfer, while playback will always be able to proceed at a constant rate, and generate output in real time, albeit with a constant delay.



The restriction with this approach is that it still makes an assumption about the average rate of data transfer over the network. The inaccuracy of such an assumption can be compensated by using longer buffers. This is why media playback over the Internet is usually preceded by several seconds of inactivity, perhaps several minutes, while the playback buffer is initially filled.

In the specialised world of video and film editing, the ability to preview a clip of image data over a network is valuable. While working on the compositing of a new film, several clips will be located remotely on a frame store. The operator of an image processing station will not wish to transfer a clip over the network unless she is certain that it contains the material she is intending to work on. Transferring the clip can take a lot of time, so it is often required that a preview is made first. However, even a quick preview can result in network capacity being exceeded, especially when there is a lot of traffic. Alternatively large buffers can be used, possibly requiring several minutes to fill, thus making the preview process less worthwhile, compared to simply loading the whole clip and viewing it once all the image frames are locally accessible.

## **Brief Summary of the Invention**

According to a first aspect of the present invention, there is provided apparatus for viewing image data, comprising display means, processing means and network connecting means for transferring frames of said image data over a network from a remotely connected frame source; said image data comprises a plurality of image frames, and has a frame rate from which may be inferred a due time for display of each frame in a sequence of frames

in said image data; said frame source returns a frame in response to a frame request issued over said network; wherein said processing means is configured to play a clip by: displaying selected frames from said frame source, on said display means, at their due time; and skipping frames in said frame sequence in response to an indication of the data transfer rate of said network

### **Brief Description of the Several Views of the Drawings**

*Figure 1* shows a network with an image processing station and a frame store, the image processing station including a monitor and a processing system;

*Figure 2* details operations performed by a user of the image processing station shown in *Figure 1*, including a step in which a clip is previewed;

*Figure 3* details a view on the monitor shown in *Figure 1*;

*Figure 4* details components of the processing system shown in *Figure 1*, including processors and a main memory;

*Figure 5* details the contents of the main memory shown in *Figure 4*, as they would appear during the preview step shown in *Figure 2*, including player instructions;

*Figure 6* summarises steps performed by the processors shown in *Figure 4* when executing the player instructions shown in *Figure 5*, including a step of waiting for the user to end playback;

*Figure 7* summarises threads operating during playback of a clip that are active during the step of waiting for a user to end playback shown in *Figure 6*, including a prefetch thread and a playback thread;

*Figure 8* summarises the invention, including details of the prefetch thread and the playback thread shown in *Figure 7*, and including steps of prefetching another frame, displaying a frame and synchronising prefetch;

5      *Figure 9* details the step of prefetching another frame shown in *Figure 8*;

*Figure 10* details the step of displaying a frame shown in *Figure 8*;

*Figure 11* details the step of synchronising prefetch shown in *Figure 8*, including a step of updating the skip rate;

10      *Figure 12* details equations relating to the step of updating the skip rate shown in *Figure 11*; and

*Figure 13* details the step of updating the skip rate, shown in *Figure 11*.

### **Best Mode for Carrying Out the Invention**

15      The invention will now be described by way of example only with reference to the accompanying drawings.

#### ***Figure 1***

20      A system for processing image data is shown in *Figure 1*. A first image processing station **101** comprises a processing system **102**, a monitor **103**, a keyboard **104** and a graphics tablet **105**. The processing system **102** is configured to perform operations for the editing and viewing of image clips. A clip comprises a sequence of image frames that are displayed on the monitor **103** at a regular rate, depending upon the format of the clip that is being  
25      played. Several standards are known, notably NTSC, which has a frame rate of thirty frames per second, PAL, which has twenty-five frames per second,

and cinematographic film, which usually has a playback rate of twenty-four frames per second. The resolution of the frames affects the amount of data that needs to be transferred in order to view a clip at its required rate.

Editing of clips is increasingly performed using digital processing equipment as shown in *Figure 1*. Instructions for image processing may be installed on the processing system 102 from a CDROM 111, or alternatively by file transfer over the Internet. Once the image application instructions are installed, a user at the image processing station 101 is able to combine several pre-recorded clips together, apply effects, crossfades, color adjustments and so on, in order to generate a fully finished work, in the form of image data for broadcast or use in part of a film. In the system shown in *Figure 1*, the first image processing station 101 is connected to a network 106, over which image data may be transferred. A second image processing station 107 and a third image processing station 108 are also connected to the network 106, and these may be configured to perform similar functions to those of the first image processing station.

Image data is stored remotely in a frame store 109. The frame store comprises a number of hard disk drives, connected together in a RAID (Redundant Array of Inexpensive Disks) configuration. This configuration facilitates high storage capacity, high reliability and high access speed for the image data. Additional frame stores may be located at each of the image processing stations, depending upon the nature of the work that is to be done. The frame store 109 is connected to a second processing system 110, through which image data is transferred to and from the network 106, and thereby to the connected image processing stations.

In a typical workflow, the user of the first image processing station edits a clip of image data. However, before editing can commence, it is necessary for the user to download the clip from the frame store 109. Sometimes the user will need to browse several clips, or sections of a long clip, before the required image data can be identified. In many cases, the amount of data contained in a clip will put a severe strain upon the network 106. Several image processing stations are connected to the network 106, and so the problem of network transfer is made worse by the unpredictable nature of network traffic.

### **Figure 2**

The workflow of a user at the first image processing station 101 is summarised in *Figure 2*. At step 201 the user switches on the processing system 102. At step 202 the user can, if necessary, install the image processing instructions, including player instructions. The player instructions may be installed separately, for example as a plug-in. Instructions may be installed from CDROM 111, the Internet, or over the network 106 from another processing station. At step 203 the image processing instructions are started. At step 204, the user previews a clip from the frame store 109, using the clip player. When the clip player is in use, the image processing station is performing the function of a viewing station, which in another embodiment may take the form of a personal digital assistant (PDA) connected to a wireless network, for example.

At step 205 the user may continue with more image processing, or alternatively, once all image processing is complete, this step finishes the workflow.

**Figure 3**

When the user instructs the processing system 102 to execute clip player instructions at step 204, a window containing the player's user interface is displayed upon the monitor 103. The player's appearance on the monitor 103 is detailed in *Figure 3*. The player 301 includes a rewind control 302, a reverse play control 303, a stop control 304, a forward play control 305 and a fast forward control 306. A timecode display 307 indicates the timecode for the currently displayed clip frame. Several text fields are provided 308 for the selection of different clips in the frame store 109, and for facilitating start of play from any frame within a clip.

Controls for selecting a skip rate are shown at 309. In the present embodiment, the skip rate may be selected as being automatic, 2:1 or 3:1. The skip rate may be set by the user, or automatically by the player, in order to facilitate optimal playback of a clip over the network 106. The clip images are displayed in a window 310 of the player.

When the user previews clips on the player, frames are always displayed at their correct time, and this is achieved by skipping some frames when this becomes necessary. Regardless of the data capacity of the network, a clip having a duration of one minute will always complete playback in one minute. The user will therefore see all actions portrayed in the clip take place with their timing preserved. A loss of network bandwidth availability will only result in a degradation in smoothness of action, not a modification of the rate at which the recorded events unfold.

**Figure 4**

The processing system 102 shown in *Figure 1* is detailed in *Figure 4*. The processing system 102 is an Octane™ produced by Silicon Graphics Inc. It comprises two central processing units 401 and 402 operating in parallel. Each of these processors is a MIPS R12000 manufactured by MIPS Technologies Incorporated, of Mountain View, California. Each of these processors 401 and 402 has a dedicated secondary cache memory 403 and 404 that facilitate per-CPU storage of frequently used instructions and data. Each CPU 401 and 402 includes separate primary instruction and data cache memory circuits on the same chip, thereby facilitating an additional level of processing improvement. A memory controller 405 provides a common connection between the processors 401 and 402 and a main memory 406. The main memory 406 comprises two gigabytes of dynamic RAM.

The memory controller 405 further facilitates connectivity between the aforementioned components of the processing system 102 and a high bandwidth non-blocking crossbar switch 407. The switch makes it possible to provide a direct high bandwidth connection between any of several attached circuits. These include a graphics card 408. The graphics card 408 generally receives instructions from the processors 401 and 402 to perform various types of graphical image rendering processes, resulting in images, and clips being rendered in real time on the monitor 103.

A SCSI bridge 410 facilitates connection between the crossbar switch 407 and a DVD/CDROM drive 411. The DVD/CDROM drive provides a convenient way of loading large quantities of data, and is typically used to install instructions for the processing system 102 onto a hard disk drive 412. Once installed, instructions located on the hard disk drive 412 may be

transferred into the main memory 406 for execution by the processors 401 and 402. An input output (I/O) bridge 413 provides an interface for the graphics tablet 105 and the keyboard 104, through which the user interacts with the processing system 102. A second SCSI bridge 414 provides an interface with a network card 102, that facilitates a network connection between the processing system 102 and the network 106.

### **Figure 5**

The contents of the main memory 406 shown in *Figure 4*, as they would appear during step 204 in *Figure 2*, are detailed in *Figure 5*. An operating system 501 provides common system functionality for application instructions running on the processing system 501. Preferably the operating system 501 is the Irix™ operating system, available from Silicon Graphics Inc. Included with the operating system instructions, are instructions 502 for making a data transfer over the network 106. Application instructions 503 include instructions for clip editing and effects processing. Included with the application instructions are player instructions 504.

Memory contents 501 to 504 comprise instructions and static data components that define how the processing system 102 operates. In addition to these components, are dynamic memory contents 505 to 507, whose constituents change as a result of instruction execution upon the processors 401 and 402. A frame queue 505 is created by the player instructions 504 in order to temporarily store frames that have been prefetched from the frame store 109 during playback. Prefetch parameters 506 determine which frames are to be fetched into the frame queue 505. Other data 507 represents all other data used by the operating system and applications running on the



processing system 102.

**Figure 6**

Steps performed by the processing system 102 during step 204 in Figure 2, in which a clip is played, are detailed in Figure 6. At step 601 the user operates the keyboard 104 and or graphics tablet 105 to interact with the player 301, to define which clip to play. The user may also set a start frame or time anywhere within the clip from which playback will begin. The user can also set the skip rate 309 to "automatic", "2:1" or "3:1". At step 602, a prefetch thread is started. This results in there being two concurrent threads of execution: the prefetch thread and the main thread of execution.

The prefetch thread is a process that independently fetches frames from the frame store 109 via the network 106. The frames are stored into the frame queue 505, which has a fixed length of eight frames.

At step 603 the main thread of execution examines the state of the frame queue, waiting until all eight frames have been prefetched before playback begins. At step 604 a player thread is created. This thread reads frames from the frame queue 505 and displays them in accordance with the time at which they are intended for display.

The main thread of execution waits at step 605, until the user performs an action that stops playback, for example, clicking on the stop button 304. When playback ends, both the prefetch thread and the player thread are stopped. At step 606 a question is asked as to whether the user wishes to play another clip, or perhaps the same clip from a different start point. If so, control is directed back to step 601. Alternatively this completes the steps performed while viewing a clip using the player 301.

**Figure 7**

The prefetch thread and the player thread are both executed concurrently during step 605 of *Figure 6*. This is illustrated by *Figure 7*.

5 Although the two threads may be considered as separate simultaneous processes, they share access to the frame queue 505 and the prefetch parameters 506.

A clip comprises multiple frames of image data that are intended to be viewed on a screen at regular intervals, for example at a rate of thirty frames  
10 per second. Knowledge of the frame rate implies a due time for display of each frame within the clip. Due time of a frame, and the frame rate for a clip, are both examples of a frame timing parameter. If the clip is to be played back from a frame different from the first frame of the clip, then this may be taken into account, and a different set of due times is implied for each of the  
15 frames that are displayed during a playback. A convenient unit of time for a clip is the frame, and, in combination with the frame rate parameter, this can be used to provide all the timing information about a clip that is necessary for correct timing of playback.

In addition to playing back frames from the frame store 109, frames  
20 may be rendered remotely by a rendering process running on a remote processing system 109, each frame being rendered in response to a request for a frame from the image processing system 101 on which the player 301 is running. The frames created in this way may be considered as a frame source, from which a clip may be viewed. For the purposes of the present  
25 embodiment, a clip is any sequence of image frames intended for display at regular intervals. The Internet is a suitable network for the transfer of image

data to the player, and an advantage is obtained over known techniques of the art, given that the rate of data transfer over the Internet is highly unpredictable.

5      **Figure 8**

The invention is summarised in *Figure 8*. In this Figure, both the prefetch and the player threads are detailed, at 701 and 702 respectively. The prefetch parameters 506 form a link from the player thread 702 to the prefetch thread 701. The prefetch parameters include a skip rate, SR, 801 and a next frame to prefetch, NP, 802. The prefetch thread 701 writes frames to the frame queue 505, and the player thread 702 reads frames from the queue 505 at their due time. The skip rate, SR, causes the prefetch thread to skip frames within the sequence of frames in a clip. In this way, the overall bandwidth required for clip playback is reduced, but each frame in the queue is still displayed at its correct due time, thus maintaining the timing integrity of the clip.

The frame queue 505 has an in-pointer 803 and an out-pointer 804. The queue is eight frames long, and is arranged as a circular buffer. In the example shown in *Figure 8*, frame numbers 144, 146 and 148 have already been displayed, and the out-pointer 804 indicates frame number 150 as being the frame currently on display. As the player thread 702 reads frames from the queue 505, the out-pointer 804 will advance through frames 150, 152, 154 and so on, while the in-pointer will advance with new frames 160, 162, and so on, assuming that the skip rate remains unchanged from its value of two. The in-pointer and out-pointer can advance at different rates: the out-pointer is under control of the player thread, which displays frames in

accordance with a match between the due time of a frame, and the elapsed real time since playback started. The prefetch thread fetches frames according to the skip rate, and so the in-pointer 803 advances according to the relation between the amount of data transferred, and the data bandwidth available for transfer over the network.

It is possible for the queue 505 to run out of frames ready for display, if the out-pointer catches up with the in-pointer. This happens if the skip rate is set too low. The skip rate may be increased manually, to 3:1, or alternatively an automatic mode can be selected, which adjusts the skip rate in accordance with a constantly updated measurement of the network data transfer rate.

The prefetch thread 701 comprises two main steps. At step 811 a question is asked as to whether the frame queue 505 is already full. If so, no action is taken, and this question is repeated until there is room for a new frame in the queue 505. At step 812 another frame is prefetched. The frame number of the next frame is given by the prefetch parameters, one or both of which, may have been updated by the player thread 702. Having prefetched another frame at step 812, control is directed back to step 811.

The player thread 702 comprises two main steps. At step 821 a frame is displayed at its due time. New frames are not always displayed, as it is often the case that the frame already on display is the one that is most appropriate for the current state of elapsed real time. At step 822 the prefetch thread is synchronised by updating one or several prefetch parameters 506. After step 822, control is directed to step 821. Synchronisation, as used in this description, means the attempt to ensure synchronous movement of the in-pointer and the out-pointer of the frame queue, such that neither overtakes

the other, and a constant gap of several new frames is maintained. The prefetch parameters control the amount of data that is transferred, so that the player thread 702 can display new frames as frequently as possible, but always at their correct due time.

5           The clip player 301 is optimised for the best possible smoothness in accordance with the changing data transfer capacity of the network, while maintaining the timing integrity of the clip. So, for example, a clip that lasts one minute ten seconds, will play back in that time, even though the network transfer rate may changes dramatically throughout playback. During  
10           playback, the smoothness changes because frames are being skipped to a greater or lesser extent, but the timing of events depicted in the clip, is preserved.

          The implementation of steps within the two threads 701 and 702 may be varied according to implementation. It is possible, for example, to use only  
15           a single thread, but with a more complex allocation of processing time for the central processors 401 and 402. Alternatively, the division of operations between the threads may be changed, or more threads used, when optimising an implementation for the environment in which the clip player is intended to operate.

20

**Figure 9**

Figures 9 to 13 contain equations within which the following parameters are used:

SR   Skip Rate  
25           NP   Next Prefetch frame number

F Current playback Frame number  
SF Start Frame from which playback commenced  
T Elapsed real time since playback started  
FRC Frame Rate for Clip  
5 TN Time to transfer last frame over network  
D Number of unread frames in queue  
P Integer value derived from NP  
S Integer value derived from F

The step 812 of prefetching another frame, shown as part of the  
10 prefetch thread 701 in *Figure 8*, is detailed in *Figure 9*. At step 901 a frame is  
prefetched into the next available location of the frame queue 505. This  
location is pointed to by the in-pointer 803, which is automatically  
incremented as a result of this step. The frame number, or index, is derived  
from the value NP, 802, which is a prefetch parameter 506. When automatic  
15 mode is selected, the player generates fractional values of NP, for example  
58.932. These fractional values are used so that over several iterations, the  
fractional parts of the parameters are accumulated and accuracy is not lost.  
However, when a frame number is required, this must be an integer value, so  
the frame requested would be frame fifty-eight, which is the integer portion of  
20 58.932.

Once the frame has been prefetched into the frame queue 505, the  
value of NP is updated by the prefetch thread at step 902, by adding the skip  
rate SR to it. At step 903 a question is asked as to whether a lock request  
has been made. A lock request can be made by the player thread 702. When  
25 the lock is granted, step 903 continues in a loop, and the player thread is  
then free to make modifications to a prefetch parameter without causing

interference with any of steps 901 or 902. For example, the player thread may update the value of NP, which can be done during the loop of step 903 without interfering with the critical operations of steps 901 and 902. It will then be certain that the value of NP set by the player thread 702 will be used at step 901. Once any such operations have been completed, the lock is released, and this completes the step 812 for prefetching another frame.

### **Figure 10**

Displaying a next frame at its due time is done at step 821 by the player thread, as shown in *Figure 8*. This step is detailed in *Figure 10*. At step 1001 a calculation is made of the next frame to display, based upon the elapsed real time. This calculation takes into account the frame rate for the clip FRC, which is a frame timing parameter. A second frame timing parameter is also used, SF, the start frame number from which playback commenced, as it is not always the case that playback will start from frame zero. The elapsed real time of playback, T, is used to control the value produced, so that whichever frame is selected from the queue for display, this selection is made in response to the real time; the time experienced by the person looking at the player 301. The frames that are being fetched from the frame store are not necessarily continuous, and need not even be in order, provided they are fetched before their respective due times for display. The result of the calculation made at step 1001 is a fractional frame value, F.

At step 1002 the queue is examined to find the most recent frame S that satisfies the condition where S is less than or equal to F. Thus it is possible that on several iterations of step 821, the same frame S will be identified at step 1002, until enough real time has elapsed to select the next

prefetched frame in the frame queue 505.

At step 1003 a question is asked as to whether frame S is already on display. If so, there is no need to perform any additional displaying operations. Alternatively, if a different frame now needs to be displayed, control is directed to step 1004. At this step, data is transferred from the frame queue 505 to the graphics card, for display on the monitor 103. At step 1005 all frames in the queue having an earlier frame number than frame S, are removed. This is achieved by incrementing the out-pointer 804 to the currently displayed frame, thus making room for one or several new frames to be fetched by the prefetch thread 701.

### **Figure 11**

Prefetch synchronisation, as performed at step 822 in *Figure 8*, is detailed in *Figure 11*. At step 1101 the prefetch lock is requested. At step 1102 a question is asked as to whether the prefetch lock has been granted. If not, control is directed to step 1101, alternatively the prefetch lock has been granted and this ensures that the prefetch thread is safely locked in the loop formed at step 903 in *Figure 9*. Thereafter it is safe for the player thread to update the prefetch parameters 506, and control is directed to step 1103.

At step 1103 a question is asked as to whether the skip rate has been set to "automatic". This is controlled by the user by the interface component indicated at 309 in *Figure 3*. If the skip rate is not automatic, it will have been set at a fixed rate, for example 2:1, as indicated at step 1104. A rate of 2:1 is defined by setting the skip rate SR to the value two. Alternatively if the skip rate is automatic, control is directed to step 1105.



At step 1105 the skip rate is updated in response to the measured rate of image transfer over the network. This results in a fractional value for SR being set, for example 3.137. Once the skip rate has been determined, whether manually or automatically, control is directed to step 1106. At step 1106 the next frame to prefetch is defined by the value of NP. NP may take a fractional value, as required when the skip rate is set automatically, and this is then converted into an integer at step 901 in *Figure 9*. The next frame to prefetch is calculated with reference to a value D, which defines the number of available unread frames in the queue. For example, if three frames, twenty-two, twenty-four and twenty-six have yet to be displayed, then the next frame to prefetch would be twenty-eight. If the resulting value of NP is less than its previous value, then the previous value is used instead. This may occur if the skip rate changes dramatically as a result in an increase in available network bandwidth.

Step 1106 is a second method of updating the value of NP, the first being performed at step 902. The results of step 902 are used whenever step 1106 has not had a chance to generate a new value. The calculation performed at step 1106 has the effect of correcting any lead or lag between the in-pointer and out-pointer of the frame queue. Synchronisation of their rate of progression through the queue is achieved by automatically calculating the skip rate at step 1105. When the skip rate has been set to a fixed value, then the calculation performed at step 1106 will ensure that the player still performs at a reasonable level of efficiency.

At step 1107, the prefetch lock is released, thus enabling both threads 701 and 702 to continue their execution independently.

**Figure 12**

The derivation of relationships used in step 1105, in which the skip rate is updated automatically, is detailed in *Figure 12*. The time for the most recent image frame to download from the network provides a measure of the network capacity. In its simplest form, the skip rate, SR, is given by the product of the frame rate for the clip, FRC, and the time, TN, required to download the last frame. However, a safety margin can be applied, to avoid using up all the available network capacity for a player on one particular workstation. In the preferred embodiment this is set to a value of 1.2, although other values, depending upon experiment, may also be chosen to optimise performance for several users on the network. The rate of data transfer over the network may vary considerably from frame to frame, and so an average of several measurements is used. A low pass filter to achieve this is shown at 1201 in *Figure 12*. In an alternative embodiment, an adaptive statistical model is used to predict the likely transfer bandwidth over the network, based upon several statistical variables generated from previous measurements of the time taken to download a frame.

**Figure 13**

Updating the skip rate automatically, performed at step 1105 in *Figure 11*, is detailed in *Figure 13*. At step 1301 a question is asked as to whether this is the first iteration of the skip rate calculation. If so, control is directed to step 1302, where the skip rate is calculated without reference to previous values. Alternatively, control is directed to step 1303, where the previous value for SR is included in the new calculation of SR, resulting in the filtering

effect. Steps **1302** and **1303** may be replaced with an adaptive statistical model in an alternative embodiment.

The invention enables high bandwidth clips to be viewed over a low bandwidth network by skipping frames. The clip completes playback in its correct time, with the only distortion being in the form of a lack of smoothness as frames are skipped. The events depicted by the clip are not speeded up or slowed down. The skip rate may be modified automatically, either by updating a next frame to fetch, NP, and or by modifying a skip rate, SR, or other parameter that achieves the same effect.

The steps that are performed include:

(a) selecting a next frame for preloading by skipping at least one frame in the clip's sequence, as performed at step **902** and or step **1106**;

(b) preloading a next frame from a frame source into a queue of frames **505**, as performed at step **901**;

(c) displaying a preloaded frame at its due time, as performed at step **821**;

(d) processing elapsed real time  $T$  since the clip started playing with a frame timing parameter, for example as performed at step **1001**, in which the frame timing parameter is FRC, the frame rate of the clip; and

(e) updating the number of frames to skip in response to step (d), as performed at step **1105** or step **1106**.

As these steps are repeated, and implemented preferably in the form of multiple concurrent threads, their order is not necessarily important. It will be understood by those skilled in the art, that implementation can be varied considerably, in order to achieve the best effect within the specific system in which the invention is to be deployed.

## Claims

1. Apparatus for viewing image data, comprising display means, processing means and network connecting means for transferring frames of  
5 said image data over a network from a remotely connected frame source;

said image data comprises a plurality of image frames, and has a frame rate from which may be inferred a due time for display of each frame in a sequence of frames in said image data;

said frame source returns a frame in response to a frame request  
10 issued over said network; wherein

said processing means is configured to play a clip by:

displaying selected frames from said frame source, on said display means, at their due time; and

skipping frames in said frame sequence in response to an indication of  
15 the data transfer rate of said network.

2. Apparatus according to claim 1, wherein said indication of the data transfer rate is provided by a comparison of the relative position of an input and an output pointer in a queue of frames that have been selected for  
20 display.

3. Apparatus according to claim 1, wherein said frame source includes means for storing pre-rendered image frames.

4. Apparatus according to claim 1, wherein said frames are  
25 skipped in response to a prediction of a network data transfer rate.

5. Apparatus according to claim 1, wherein frames are prefetched into a frame queue prior to their due time.

5 6. Apparatus according to claim 1, wherein a frame skip rate is defined by a user.

7. Apparatus according to claim 1, wherein a frame is selected for display by processing its due time with elapsed real time since playback  
10 started.

8. Apparatus for displaying image data, comprising display means, processing means, memory means and network connecting means for enabling transfer of image data over a network from a frame source  
15 remotely connected to said network, in which:

said image data comprises a plurality of image frames, sequences of said frames being organised into clips, each clip having a frame rate, and each frame in a clip thereby having a due time for display with respect to a start time for playing the clip; wherein

20 said processing means is configured to perform operations to play a clip from said frame source by repeating steps of:

(a) selecting a next frame for preloading by skipping at least one frame in the clip's frame sequence;

(b) preloading a frame from said frame source into a frame queue  
25 in said memory means;

- (c) displaying a preloaded frame at its due time;
- (d) processing elapsed real time since the clip started playing with a frame timing parameter; and
- (e) updating the number of frames to skip in response to said processing step (d).

9. Apparatus according to claim 8, wherein said frame timing parameter is the due time for a frame.

10. Apparatus according to claim 8, wherein instructions for steps (a) to (e) are executed as multiple threads.

11. A method of displaying image data on an image viewing station that comprises display means, processing means and network connecting means for transferring frames of said image data over a network from a remotely connected frame source;

said image data comprises a plurality of image frames, and has a frame rate from which may be inferred a due time for display of each frame in a sequence of frames in said image data;

said frame source returns a frame in response to a frame request issued over said network; wherein

said processing means is configured to play a clip in which said method includes:

displaying selected frames from said frame source, on said display means, at their due time; and

skipping frames in said frame sequence in response to an indication of the data transfer rate of said network.

5           12.    A method according to claim 11, wherein said indication of the data transfer rate is provided by a comparison of the relative position of an input and an output pointer in a queue of frames that have been selected for display.

10           13.    A method according to claim 11, wherein said frame source includes means for storing pre-rendered image frames.

          14.    A method according to claim 11, wherein said frames are skipped in response to a prediction of a network data transfer rate.

15           15.    A method according to claim 11, wherein frames are prefetched into a frame queue prior to their due time.

20           16.    A method according to claim 11, wherein a frame skip rate is defined by a user.

          17.    A method according to claim 11, wherein a frame is selected for display by processing its due time with elapsed real time since playback started.

25           18.    A method for displaying image data on an image viewing station that comprises display means, processing means, memory means

and network connecting means for enabling transfer of image data over a network from a frame source remotely connected to said network, in which:

said image data comprises a plurality of image frames, sequences of said frames being organised into clips, each clip having a frame rate, and  
5 each frame in a clip thereby having a due time for display with respect to a start time for playing the clip; wherein

said processing means is configured to perform operations to play a clip from said frame source by a method comprising repeated steps of:

(a) selecting a next frame for preloading by skipping at least one  
10 frame in the clip's frame sequence;

(b) preloading a frame from said frame source into a frame queue in said memory means;

(c) displaying a preloaded frame at its due time;

(d) processing elapsed real time since the clip started playing with  
15 a frame timing parameter; and

(e) updating the number of frames to skip in response to said processing step (d).

19. A method according to claim 18, wherein said frame timing  
20 parameter is the due time for a frame.

20. A method according to claim 18, wherein instructions for steps (a) to (e) are executed as multiple threads.

21. A data structure upon a machine readable medium, comprising  
25 instructions for controlling an image viewing system to perform steps for



viewing image data, said viewing system comprising:

display means, processing means and network connecting means for transferring frames of said image data over a network from a remotely connected frame source;

5           said image data comprising a plurality of image frames, and has a frame rate from which may be inferred a due time for display of each frame in a sequence of frames in said image data;

          said frame source returns a frame in response to a frame request issued over said network; wherein

10           said processing means being configurable by said instructions to play a clip in which said method includes:

          displaying selected frames from said frame source, on said display means, at their due time; and

          skipping frames in said frame sequence in response to an indication of  
15           the data transfer rate of said network.

22.    A data structure according to claim 21, wherein said indication of the data transfer rate is provided by a comparison of the relative position of an input and an output pointer in a queue of frames that have been selected  
20           for display.

23.    A data structure according to claim 21, wherein said frame source includes means for storing pre-rendered image frames.

24.    A data structure according to claim 21, wherein said frames are  
25           skipped in response to a prediction of a network data transfer rate.

25. A data structure according to claim 21, wherein frames are prefetched into a frame queue prior to their due time.

5           26. A data structure according to claim 21, wherein a frame skip rate is defined by a user.

27. A data structure according to claim 21, wherein a frame is selected for display by processing its due time with elapsed real time since  
10           playback started.

18. A data structure upon a machine readable medium, comprising instructions for controlling an image viewing system to perform steps for viewing image data, said viewing system comprising:

15           display means, processing means, memory means and network connecting means for enabling transfer of image data over a network from a frame source remotely connected to said network, in which:

          said image data comprises a plurality of image frames, sequences of said frames being organised into clips, each clip having a frame rate, and  
20           each frame in a clip thereby having a due time for display with respect to a start time for playing the clip; wherein

          said processing means is configured to perform operations to play a clip from said frame source by a method comprising repeated steps of:

          (a) selecting a next frame for preloading by skipping at least one  
25           frame in the clip's frame sequence;

(b) preloading a frame from said frame source into a frame queue in said memory means;

(c) displaying a preloaded frame at its due time;

(d) processing elapsed real time since the clip started playing with a frame timing parameter; and

(e) updating the number of frames to skip in response to said processing step (d).

29. A data structure according to claim 28, wherein said frame timing parameter is the due time for a frame.

30. A data structure according to claim 28, wherein instructions for steps (a) to (e) will be executed as multiple threads.

**Abstract of the Disclosure****Displaying Image Data**

5 A method of viewing a clip of image data stored (109) remotely on a network (106). The viewing is performed by an image processing station (101) connected to the network. Frames of a clip are prefetched (701) and certain of the frames in a frame sequence are skipped, in alternation with frames that are fetched. Frames are skipped to compensate for network conditions. Display (702) of the prefetched frames is performed by selecting 10 (1001) a prefetched frame for display appropriate to the elapsed real time since playback started. The clip is viewed in real time, even though the network (106) does not necessarily support the data transfer rate required for full playback of the clip.

15 (Figure 8)

1/13

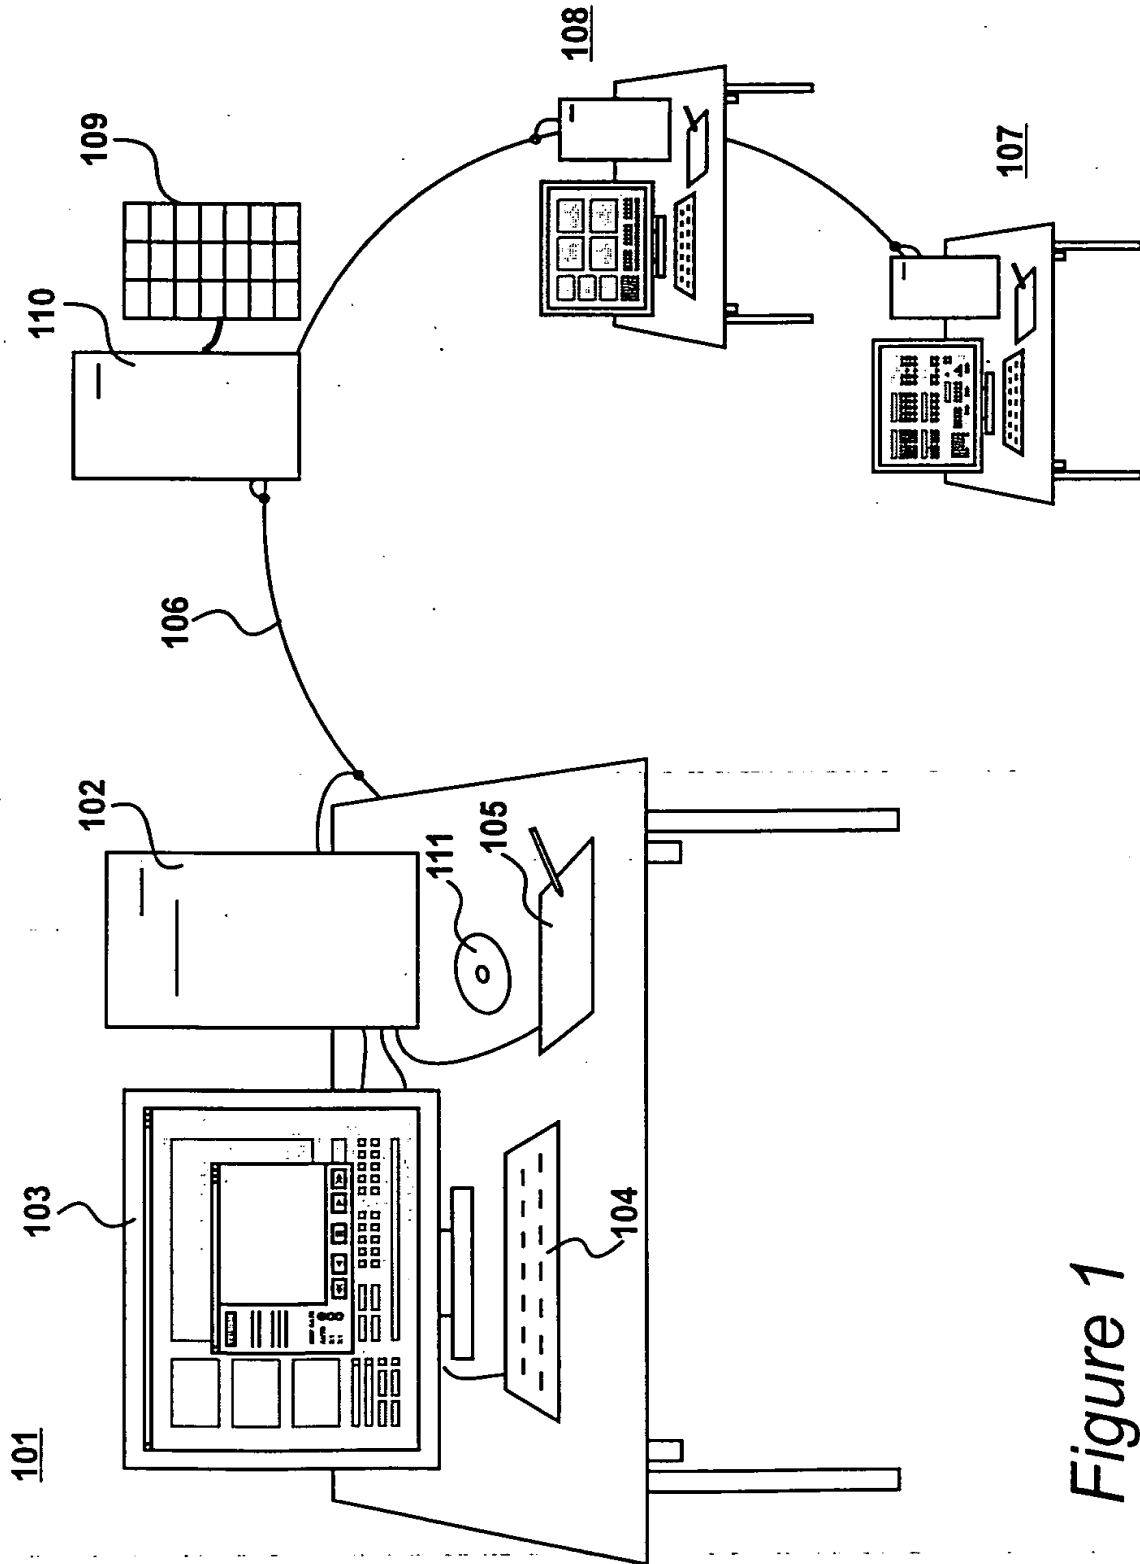
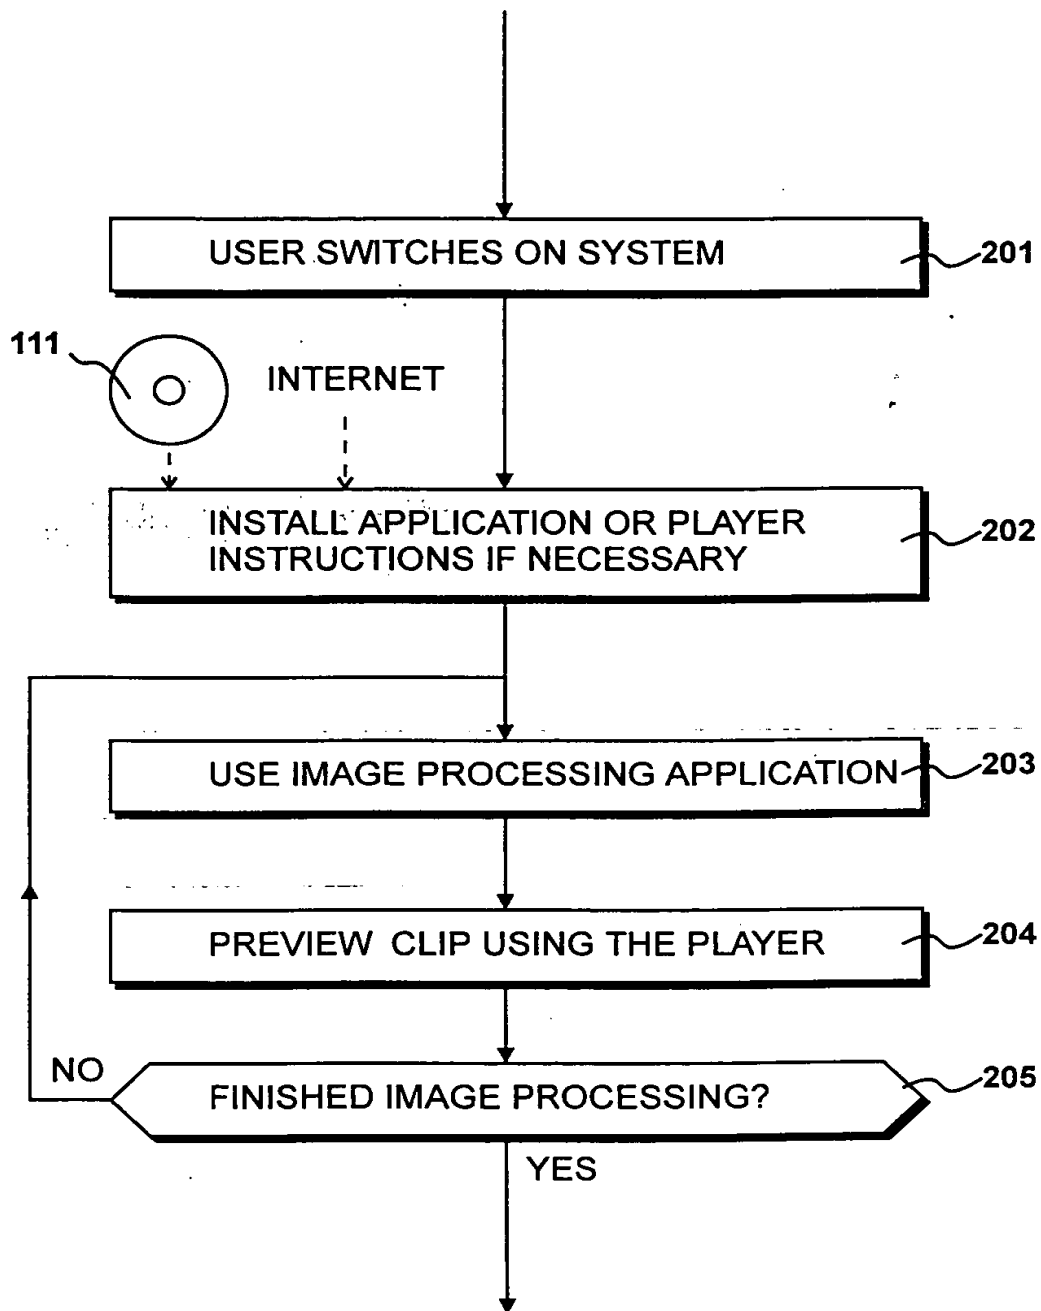


Figure 1

**THIS PAGE BLANK (USPTO)**

2/13

*Figure 2*

**THIS PAGE BLANK (USPTO)**



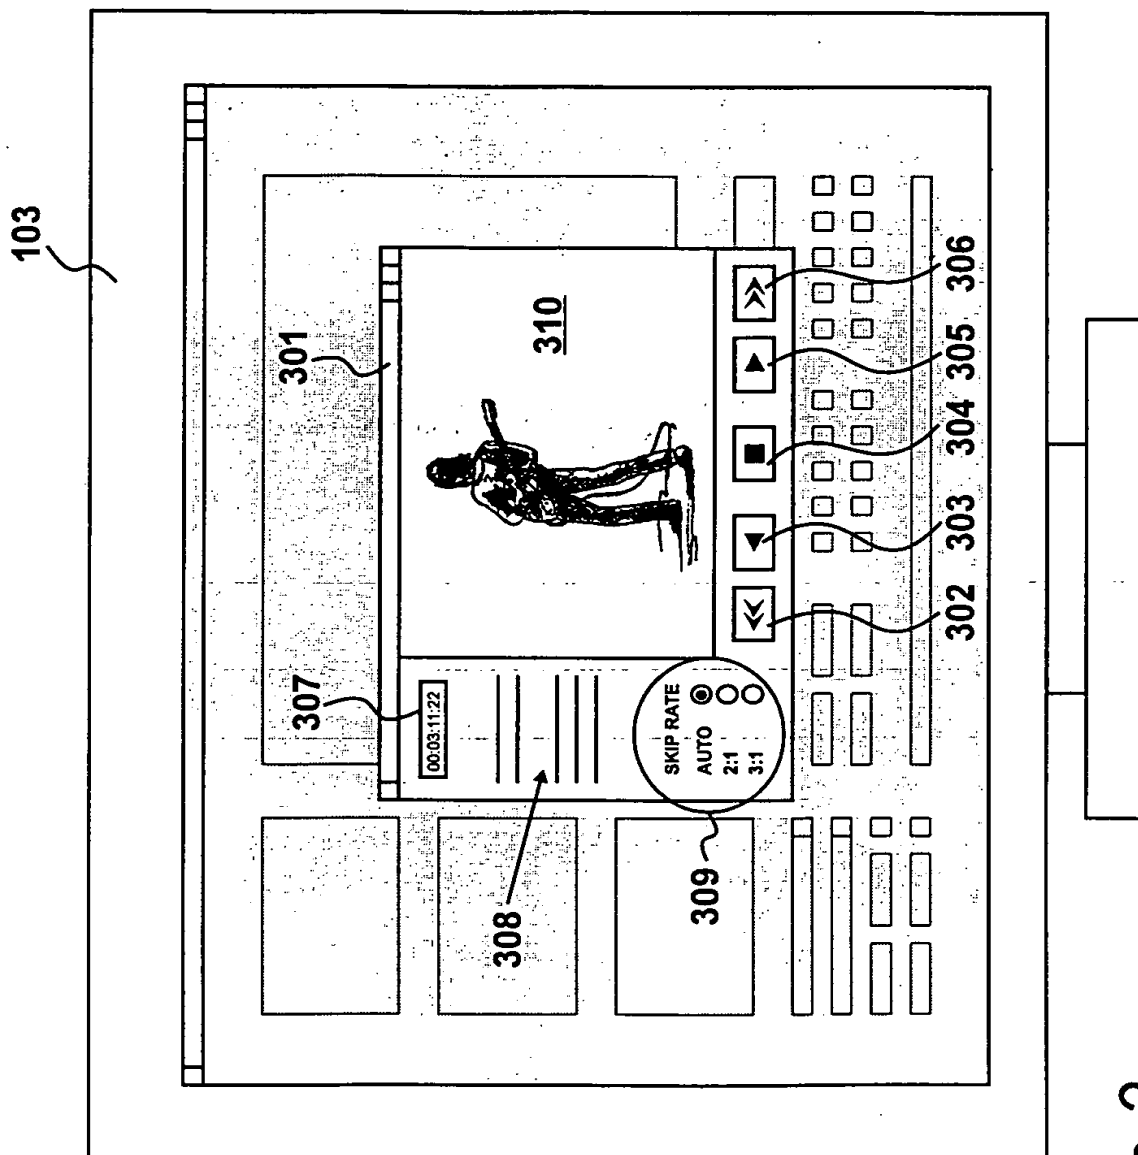


Figure 3

**THIS PAGE BLANK (USPTO)**

4/13


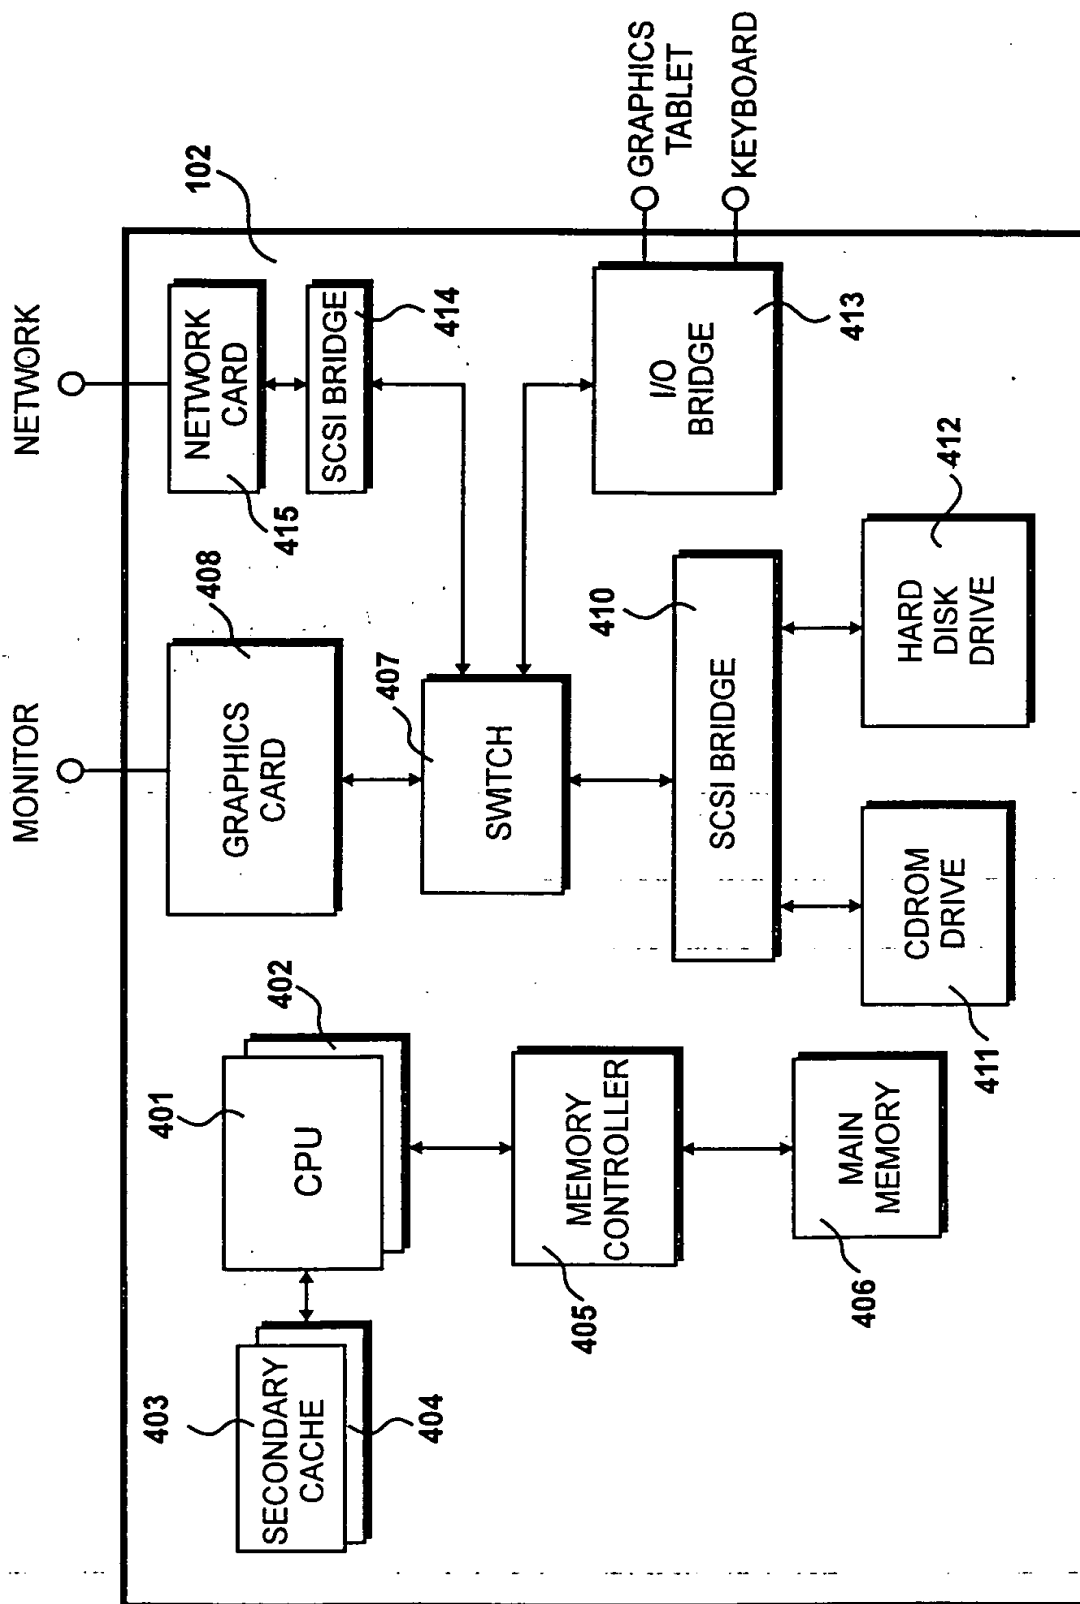


Figure 4

**THIS PAGE BLANK (USPTO)**


5/13

406*Figure 5*

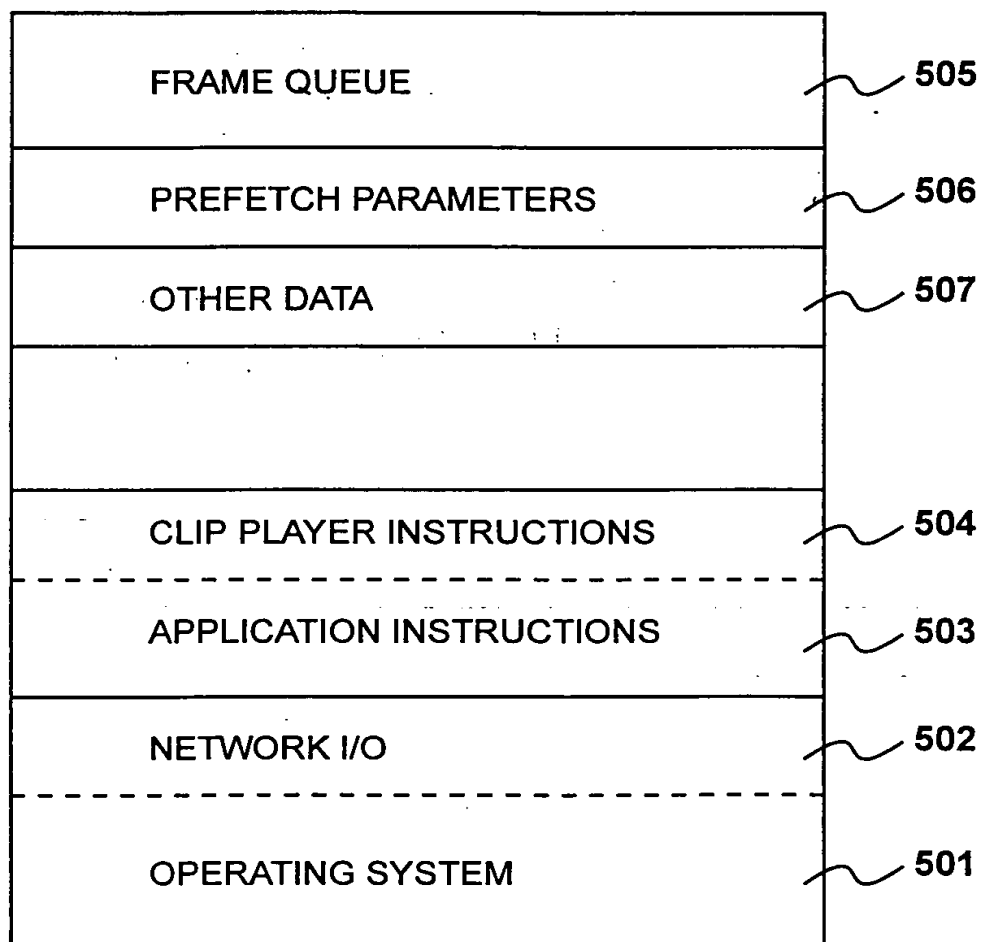

**THIS PAGE BLANK (USPTO)**

6/13

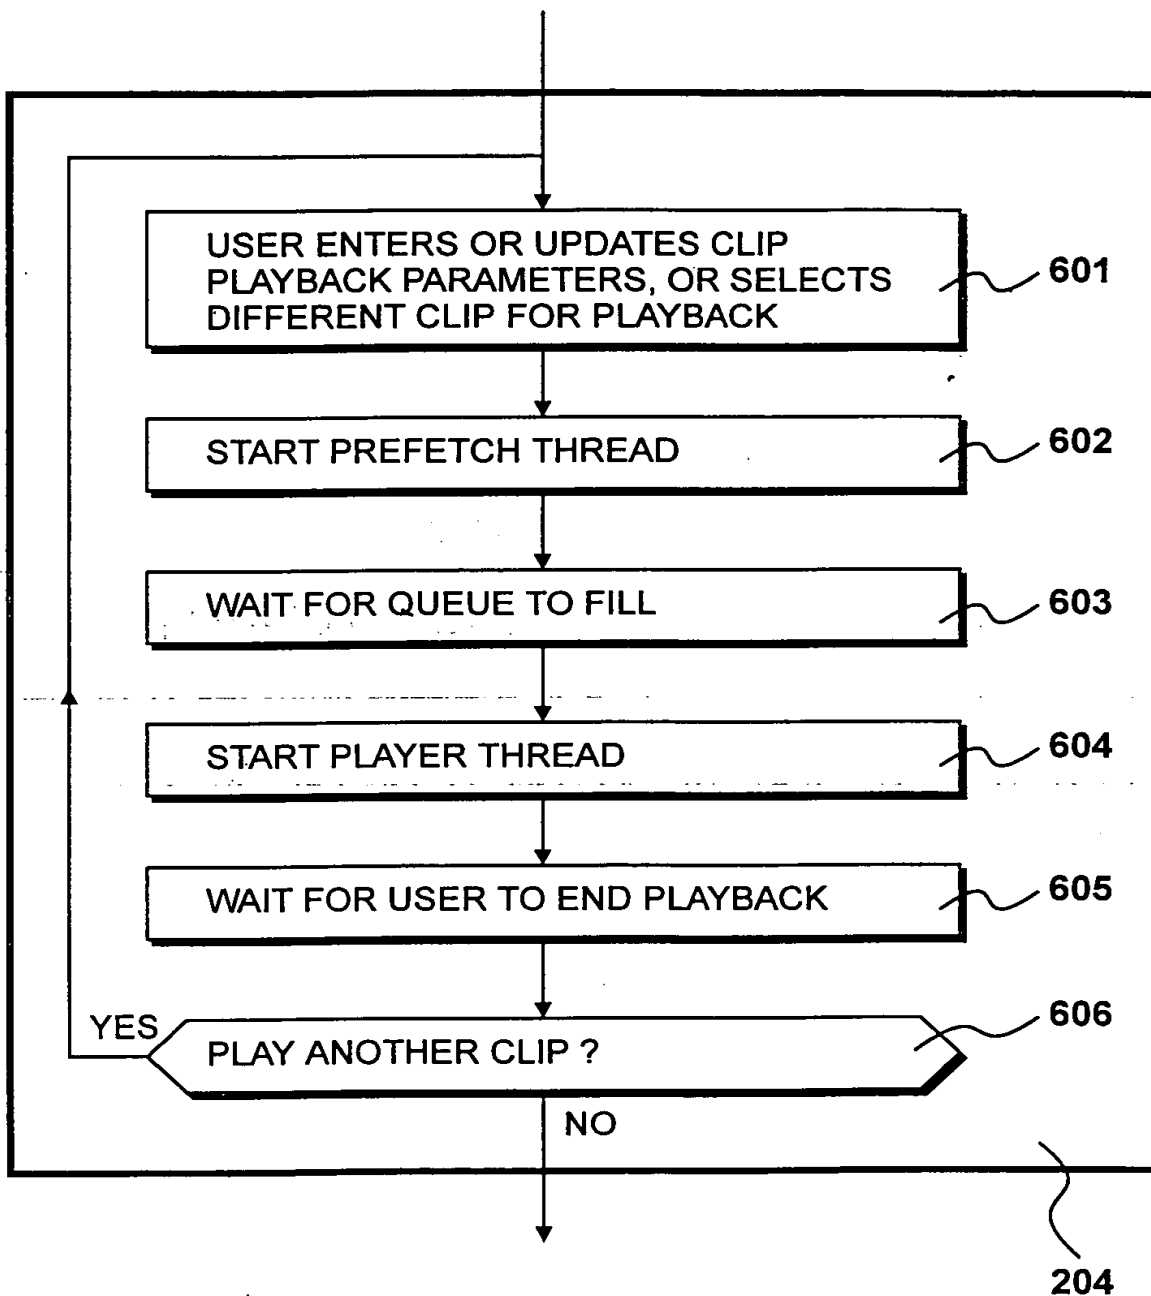*Figure 6*

**THIS PAGE BLANK (USPTO)**



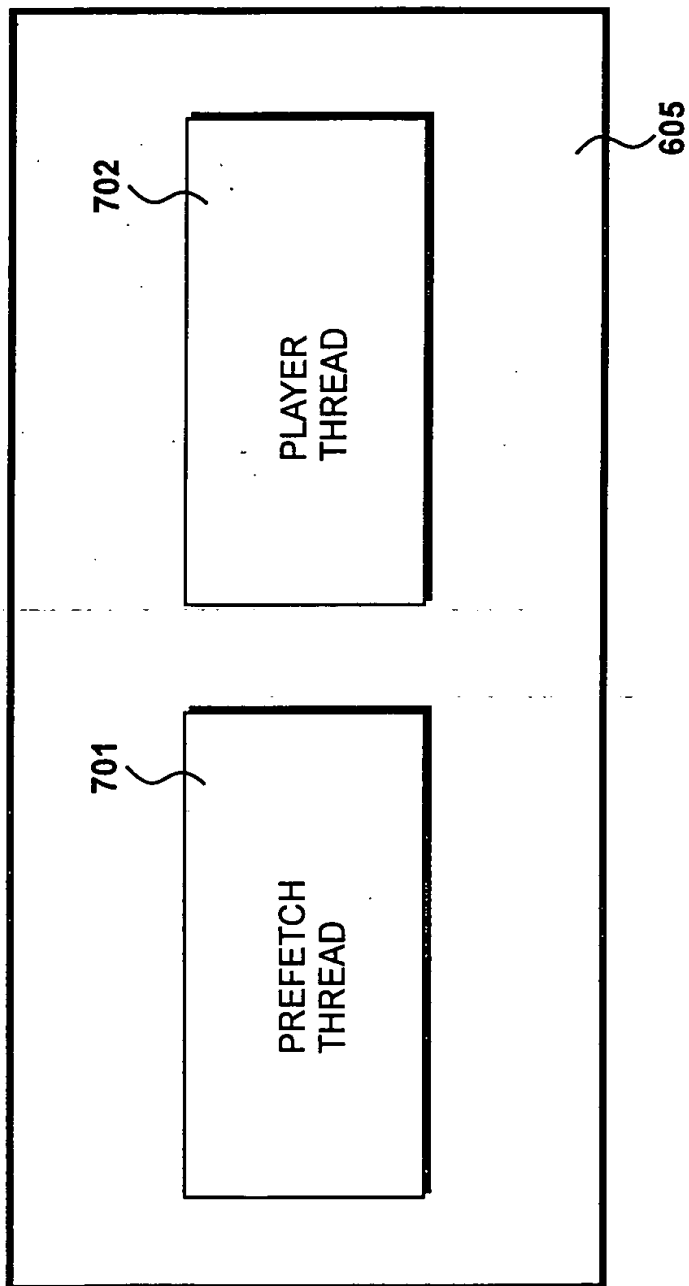


Figure 7

**THIS PAGE BLANK (USPTO)**

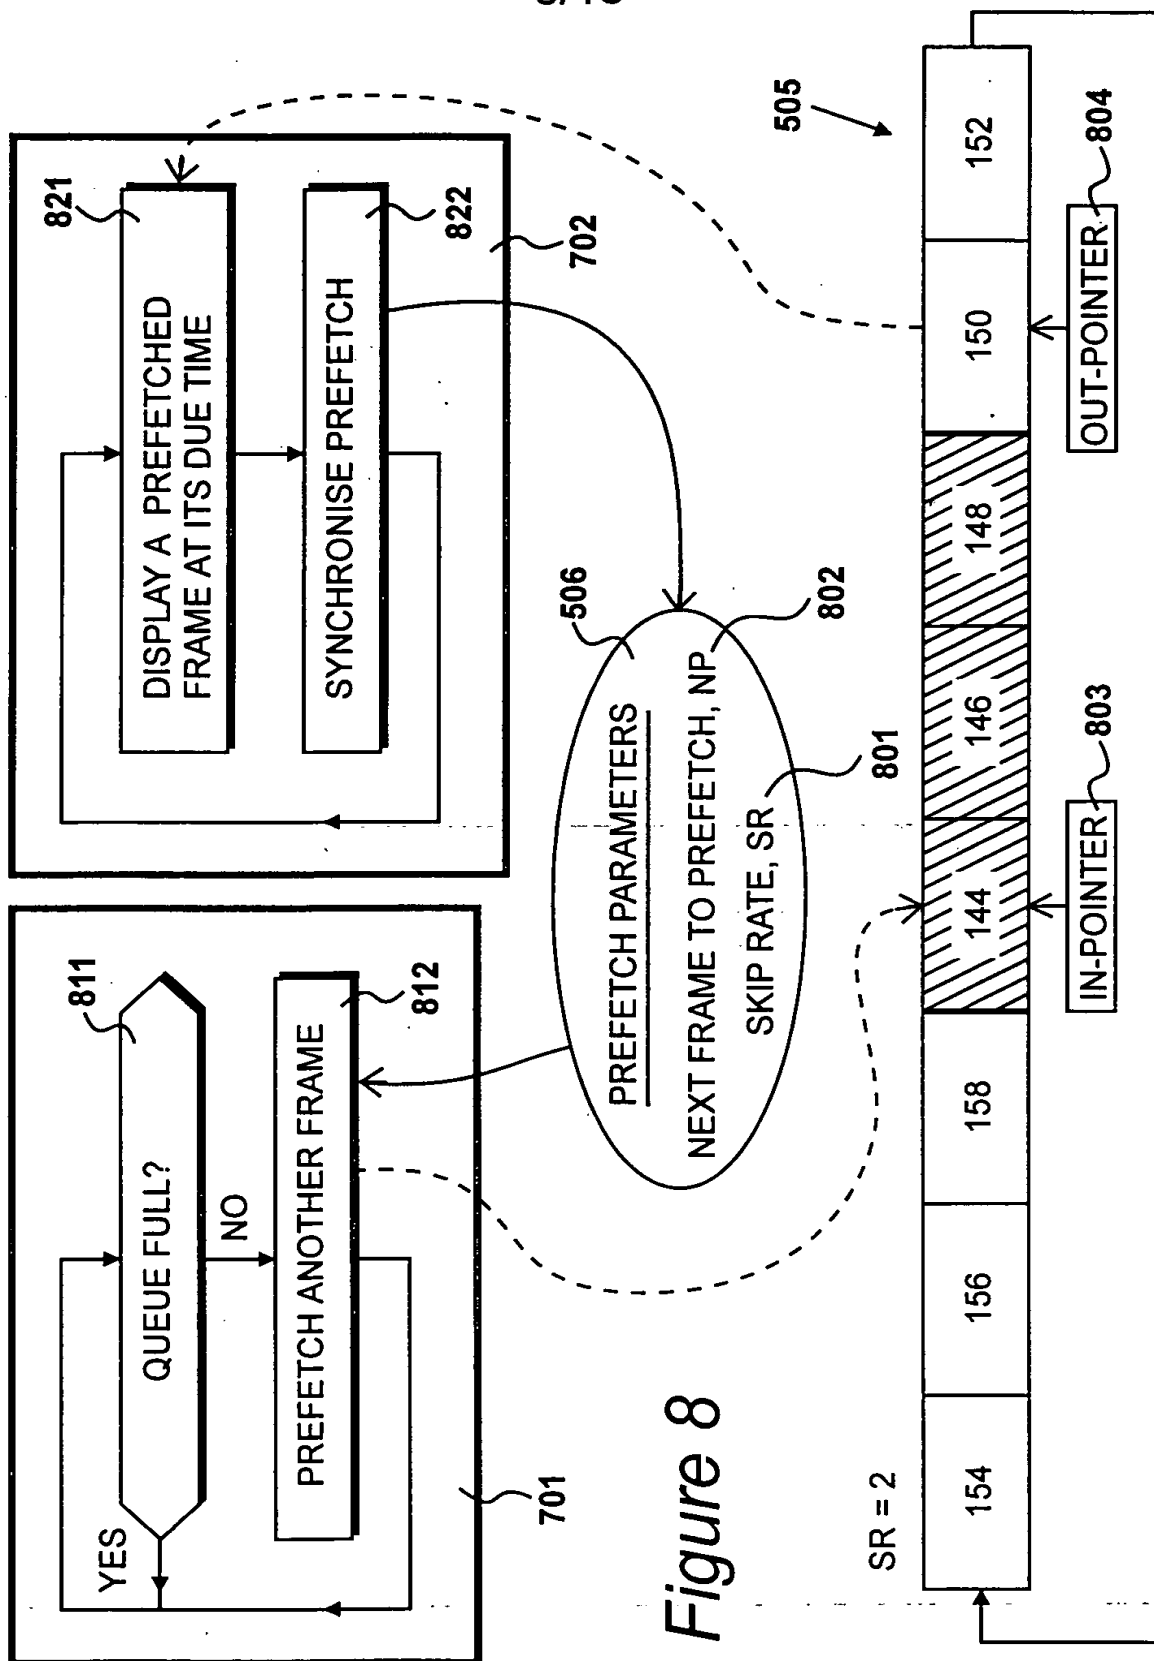
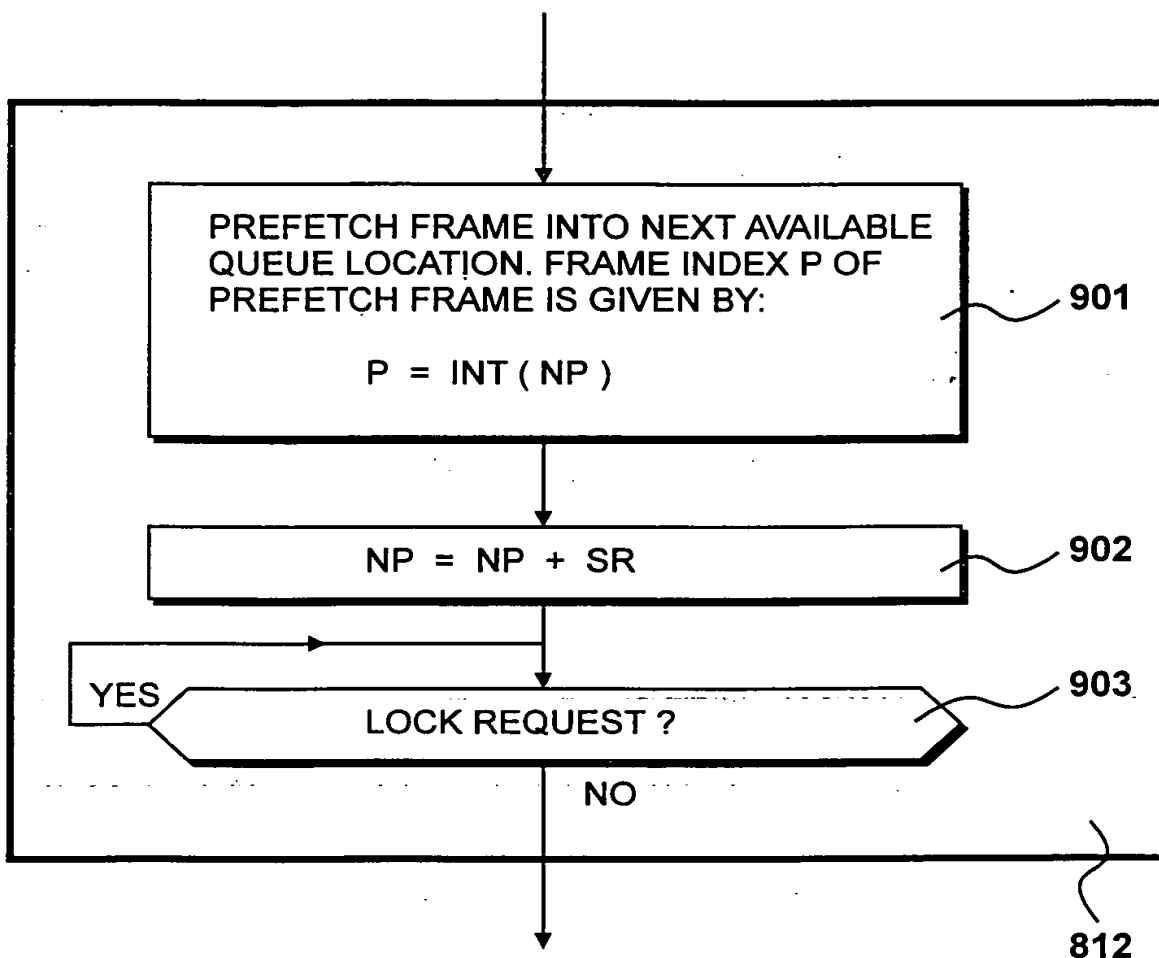


Figure 8

**THIS PAGE BLANK (USPTO)**


9/13

*Figure 9*

P = Integer index of next frame to prefetch  
NP = Non-integer index of next frame to prefetch  
SR = Skip rate

**THIS PAGE BLANK (USPTO)**

10/13

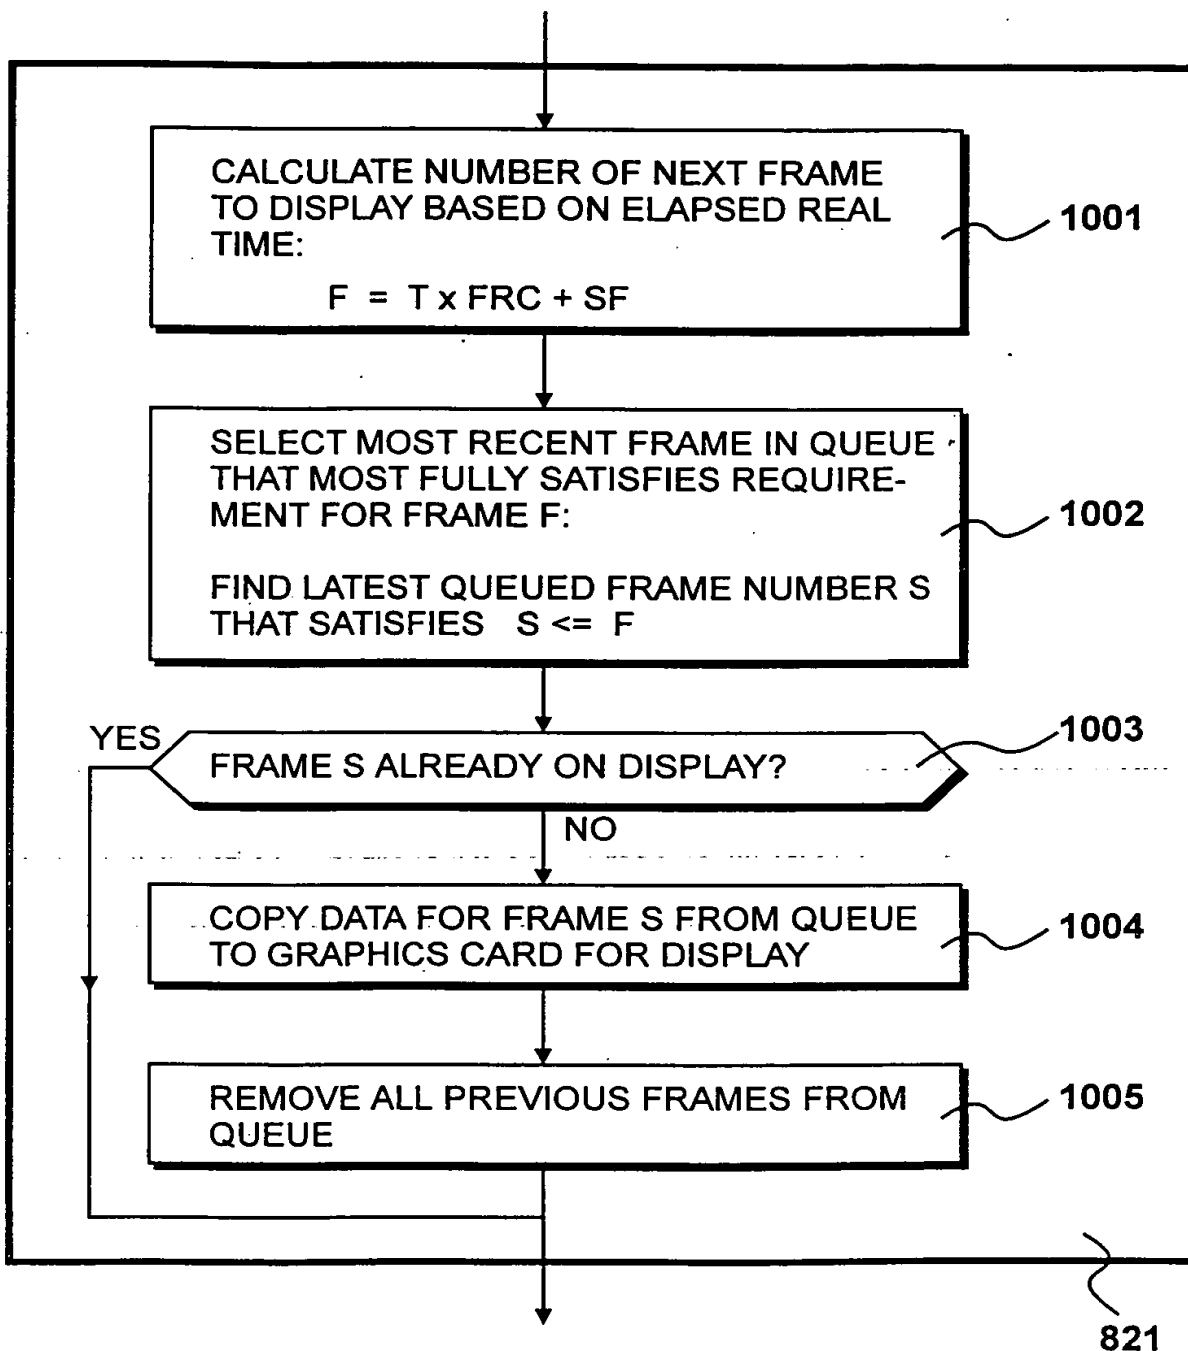


F = Current playback frame number  
T = Elapsed real time since clip started playing  
FRC = Frame rate for clip  
SF = Start frame from which playback commenced  
S = Frame selected for display to most fully satisfy requirement for frame F

*Figure 10*

**THIS PAGE BLANK (USPTO)**



11/13

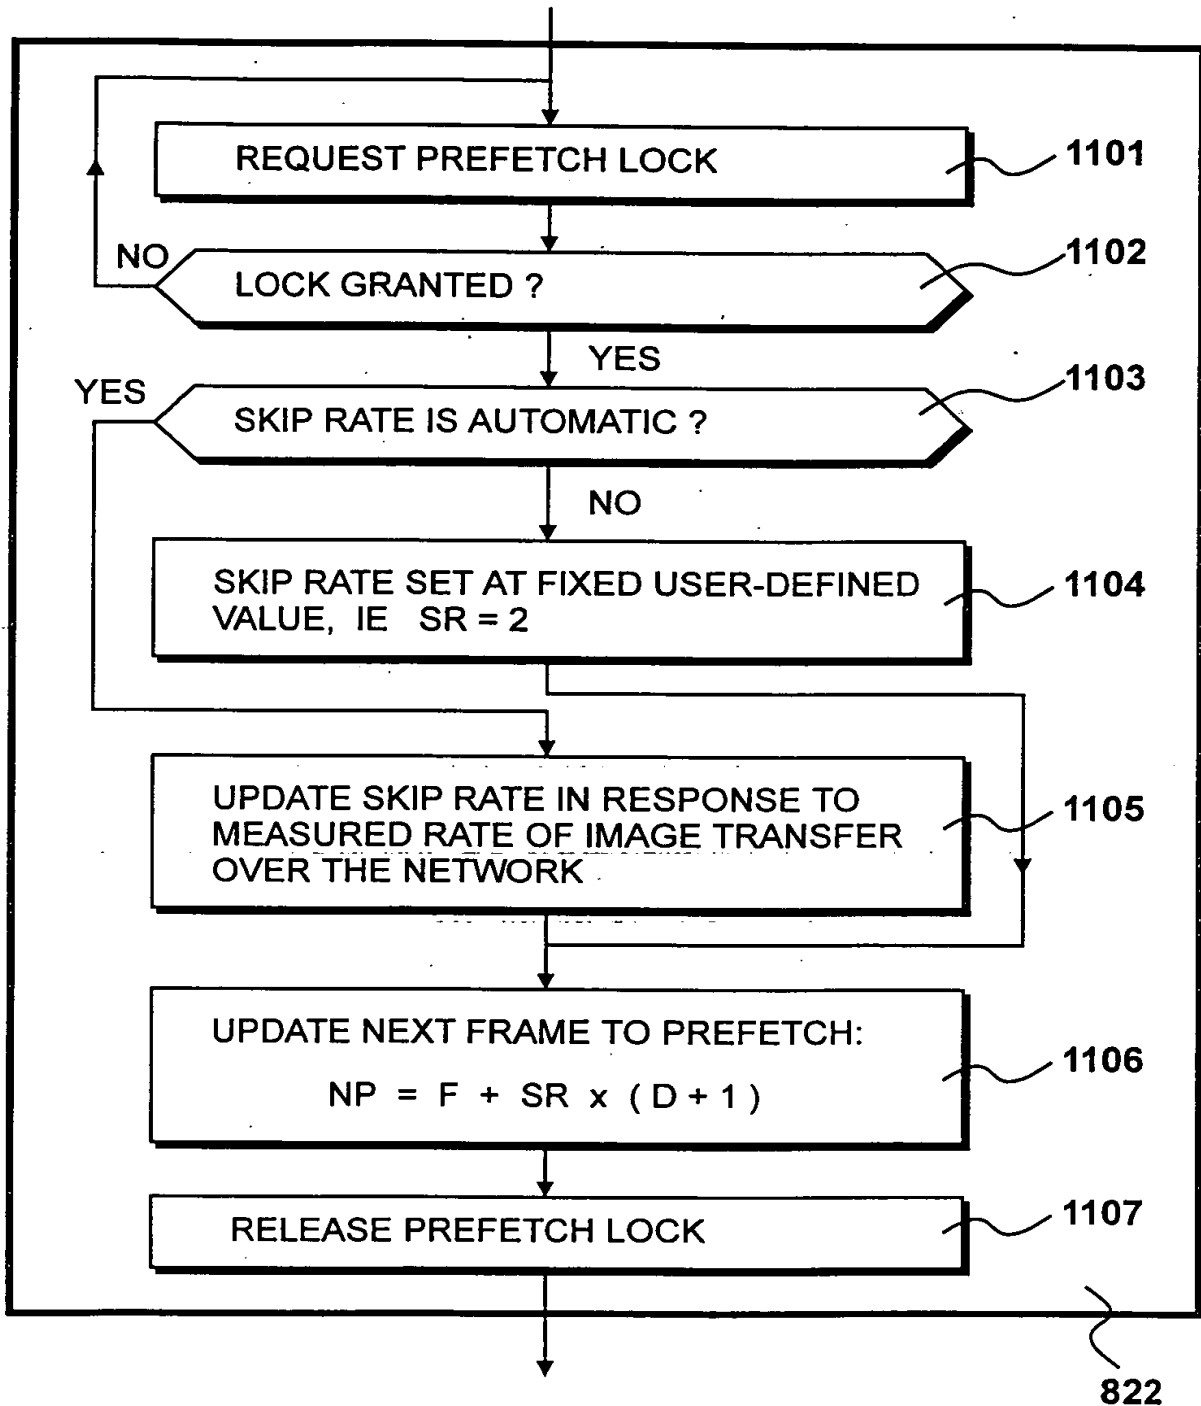

SR = Skip rate  
NP = Next prefetch frame number  
F = Current playback frame number  
D = Number of unread frames in queue

*Figure 11*

**THIS PAGE BLANK (USPTO)**

12/13

IF  $T_N$  = THE AMOUNT OF TIME TAKEN TO  
TRANSFER THE MOST RECENT IMAGE OVER  
THE NETWORK (IN SECONDS), THEN

THE RATE OF NETWORK TRANSFER,  $R_N$ , IS  
GIVEN BY:

$$R_N = \frac{1}{T_N}$$

THE SKIP RATE IS THE RATIO OF THE FRAME  
RATE OF THE CLIP,  $FRC$ , TO THE ACHIEVABLE  
RATE,  $R_N$ , OF FRAME TRANSFER OVER THE  
NETWORK:

$$SR = \frac{FRC}{R_N}$$

AND THEREFORE:

$$SR = FRC \times T_N$$

WITH A SAFETY MARGIN:

$$SR = FRC \times T_N \times 1.2$$


AND WITH A LOW PASS FILTER:

$$SR = 0.75 ( FRC \times T_N \times 1.2 ) + 0.25 \times SR$$

1201

*Figure 12*

**THIS PAGE BLANK (USPTO)**

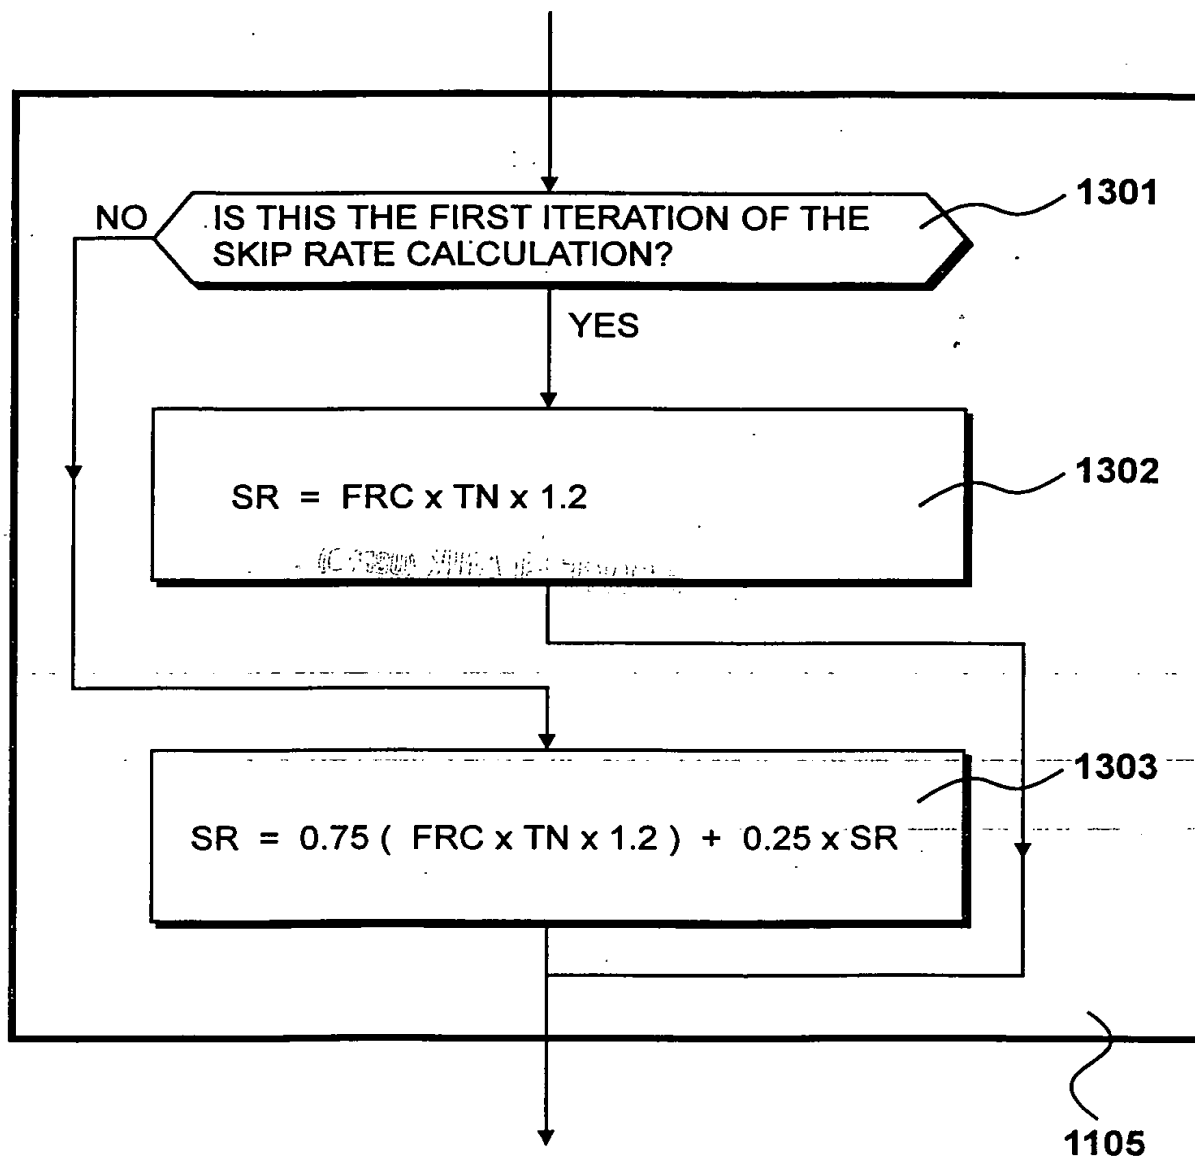*Figure 13*

SR = Skip rate

FRC = Clip frame rate

TN = Time to transfer most recent frame over the network

**THIS PAGE BLANK (USPTO)**